

Discover the RAK-2

Thank you for choosing a Sine Systems remote control system. Our goal is to provide you with a high-quality device that will give you years of reliable service.

This document provides basic setup instructions. Complete system documentation, installation utilities and programming assistance can be found on the memory device that is included in the accessory kit.

Unpack the RAK-2

The RAK-2 Intelligent Rack Adapter package contains these items:

- Intelligent Rack Adapter model RAK-2
- Modular telephone cable, 7 ft. long
- Ethernet network cable, 5 ft. long
- Flat cable with two connectors, 3 ft long
- Power cable, 3 conductor IEC C13
- Flat blade adjustment screwdriver
- Rack mounting hardware, one pair
- Memory device with manual and software


The RAK-2 should be inspected for obvious signs of damage or loose parts when unpacked. If damage is found, save the packing material and contact the shipping company and the dealer from which the system was purchased.

Rack Mount the RAK-2

The RAK-2 is housed in a standard EIA single space (1U) 19-inch rack mounted chassis. The system generates little heat and can be installed in most any convenient rack space.

Connect the RAK-2

All connections are made on the rear panel of the RAK-2.

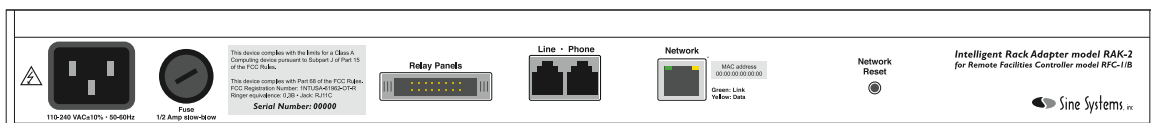

- Connect the relay panel(s) to the 16-pin connector labeled “Relay Panels” using the flat cable
- Connect the telephone line to the RJ-11 jack labeled “Line” using the modular telephone cable
- Connect the local telephone to the RJ-11 jack labeled “Phone”
- Connect the network router or switch to the connector labeled “Network” using the cat 5 cable
- Connect the power cord to the main power supply

The RAK-2 uses a “universal” power supply. There are no switches or jumpers to adjust.

Locate the RAK-2

In order to operate the RAK-2 you must be able to locate it on the local network.


Local Network IP Address

The RAK-2 will accept an IP address from a DHCP server if there is one on the network. The default IP address is 192.168.2.2 when a DHCP server is not available.

The router that assigns IP addresses on the network usually provides a list of IP addresses in use. The list often includes the name and the MAC address of each device. An RAK-2 can be identified by the name "SINESYSTEMSRFC1" or by the MAC address on the label on the RAK-2.

Network Device Discovery Tool

The Network Device Discovery Tool can help locate RAK-2 devices on the local network. The tool polls the local network and returns the IP address of all Sine Systems devices it finds on the network.

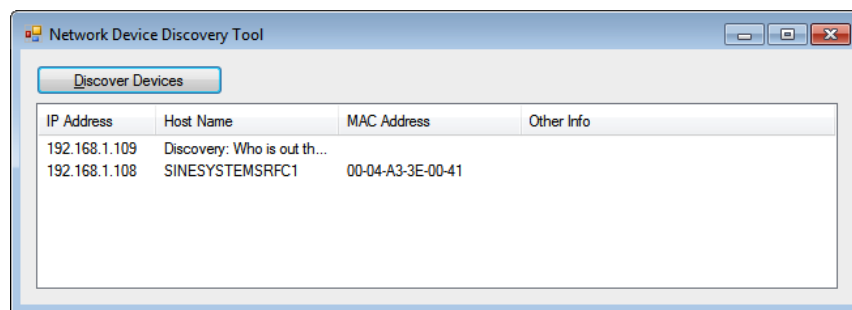

This tool is included on the memory device that is in the accessory kit. It can also be downloaded from the Sine Systems website at www.sinesystems.com.

NetBIOS Identifier

The RAK-2 also identifies itself to the network with the NetBIOS name "SINESYSTEMSRFC1". On some networks the RAK-2 may be accessed with the URL <http://SINESYSTEMSRFC1>.

Enjoy the RAK-2

The RAK-2 settings are adjusted through the web interface. Once you have located the RAK-2 on the network, direct your web browser to the RAK-2 to operate and adjust the RAK-2.

The RAK-2 uses an embedded RFC-1 Remote Facilities Controller to perform the remote control functions. If you are already familiar with the RFC-1 then most of the system will be familiar to you.

The memory key that stores your product documentation also holds useful software utilities like **Setup Tool 6**, a Windows-based program that helps you program the embedded RFC-1.

Please spend some time with the full system documentation and discover the new features and options that are available in this system. Thanks again and enjoy!